


SHEET _____

SECTION _____



PRODUCT SUBMITTAL DATA

ENGRAVED PLASTIC NAMEPLATES

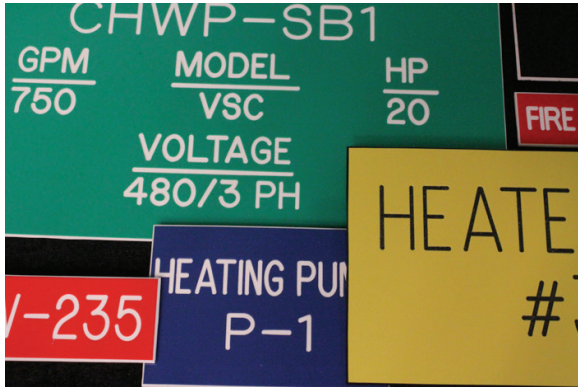

DESCRIPTION: Durable indoor/outdoor valve and equipment identification. ABS/Acrylic co-extruded plastic featuring a multi layer design(2ply or 3ply) which is permanently fused together with contrasting core and cap colors.

Available in 1/16" and 1/8".

USE: For indoor/outdoor marking of commercial & industrial equipment & facilities.

LEED Compliances: This product is in compliance with Standards set forth by the South Coast Air Quality Management District (SCAQMD) Rule#1168 and the Green Seal Standard, GS-36 for Commercial Adhesives pertaining to Volatile Organic Compounds (VOC). When supplied with Adhesive Backing. Self-Stick adhesive backing contains less than 5.8g/Liter volatile organic compounds.

Craftflex-plastic nameplates and signs are made to you exact specifications. Engraved through colored layers to expose rich contrasting text. Excellent for all indoor/outdoor marking needs. Choose from a wide array of color combinations, sizes and thickness. 18 stock sizes-choose holes or adhesive backing. All sides chamfered for a clean, finished appearance.

STANDARD COLORS AVAILABLE

RED/WHITE

GREEN/WHITE

YELLOW/BLACK

BLACK/WHITE

WHITE/BLACK

BLUE/WHITE

ORANGE/WHITE

GRAY/BLACK

BROWN/WHITE

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____

ENGRAVED PLASTIC NAMEPLATES (Continued)

ADHESIVE: N/A for screw applied/holes.

For adhesive backed-2 mil permanent acrylic adhesive backing.

SURFACE PREPARATION: N/A for screw applied/holes.

SERVICE TEMPERATURE: -40°F to 180°F

APPLICATION TEMPERATURE: N/A for screw applied/holes.

AVERAGE OUTDOOR DURABILITY: 5 years

CHEMICAL RESISTANCE: GOOD

MOISTURE RESISTANCE: EXCELLENT

ABRASION RESISTANCE: EXCELLENT

GLOSS: 60 Gardner units

STORAGE STABILITY: Indefinite for screw/hole attached.

2-3 years for adhesive backed when stored at 70°F at 50% relative humidity.

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____
