

SHEET _____
 SECTION _____



PRODUCT SUBMITTAL DATA

ROLLMARK IV SELF-STICK ROLLFORM PIPE MARKER



DESCRIPTION: Self-adhesive rolls of preprinted stock and custom pipe markers. Typical use would be for 360° wrap-around marking of pipe.

USE: Use to identify piping systems. Designed for all pipe marking jobs. 30' rolls.


COMPLIANCE: Complies 100% to ASME (ANSI) A13.1 2007 scheme for the Identification of Piping Systems for color, color field width & letter size.

Rollmark IV is a great self-stick marking system that is cut to size on the job site. Great for any pipe marking job. Markers are printed with ultra durable vinyl for wrap-around applications.

FEATURES:

- Ultra durable self-stick vinyl for indoor/outdoor use.
- Available in four popular widths 6", 8", 12", 24" to handle any marking requirement. 30' long rolls!
- Legends continuously repeated.
- 360° Visibility
- 145 stock legends!
- Custom legends/colors available.

• ROLLMARK IV Application Guide

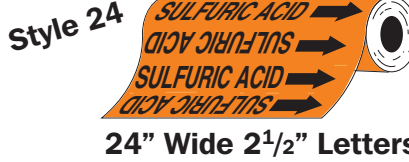

• STANDARD COLORS

FLAMMABLE FLUIDS

POTABLE, COOLING, BOILER FEED & OTHER

COMPRESSED AIR

FIRE QUENCHING FLUIDS

TOXIC & CORROSIVE FLUIDS

COMBUSTIBLE FLUIDS

USER DEFINED

USER DEFINED

USER DEFINED

USER DEFINED

DATE: ___ / ___ / ___ JOB: _____

CONTRACTOR: _____

ROLLMARK IV SELF-STICK ROLLFORM PIPE MARKER (Continued)

ADHESIVE: Permanent, aggressive acrylic pressure sensitive adhesive. Sticks to most pipe and pipe covering material.

SURFACE PREPARATION: Surface should be dry, oil free, dirt free and above the minimum application temperature .

SERVICE TEMPERATURE: -40°F to 200°F (-40°C to 93°C)

APPLICATION TEMPERATURE: Minimum application temperature of 50°F (10°C)

AVERAGE OUTDOOR DURABILITY: 5 years outdoor - mid continental U.S.

CHEMICAL RESISTANCE: VERY GOOD

MOISTURE RESISTANCE: EXCELLENT MOISTURE RESISTANCE

ABRASION RESISTANCE: VERY GOOD ABRASION RESISTANCE

GLOSS: 40 Gardner units (20° test)

STORAGE STABILITY: 2 years typical at 70°F (21°C) at 50% relative humidity.

DATE: ___ / ___ / ___

JOB: _____

CONTRACTOR: _____